

UNLEASH YOUR **VISION,**

DESIGN YOUR **WORLD**

SUGAR+
COLLECTION 600x1200mm



COLLECTIONS TO SATISFY ALL YOUR NEEDS

LAPPATO
COLLECTION

Sugar+
CARVING SURFACE

Suger
Shine
COLLECTION

SUGAR finish tiles feature a delicate, sparkly texture that adds a touch of glamour to any space. Perfect for accentuating areas like lobbies and reception halls, their unique finish creates a captivating and stylish ambiance.

SIZE & THICKNESS



Dimensions

9MM	600x1200mm	60x120cm
8.5 MM	600x600mm	60x60cm



We are, without a doubt, a vision of progress and expansion. To manufacture products that meet worldwide standards, our production facilities employ cutting-edge technology. We strive to elevate the standard for ourselves so that we can meet our customers' expectations for both product aesthetics and long-term functionality. Our true assets are our hardworking, honest and focused staff, who work tirelessly to produce products that set new benchmarks in efficiency, design, and innovation.

FEATURES & ADVANTAGES



**Bending
Strength**



**Hygienic
Surface**



**Resistant
To Ice & Frost**



**Color
Stability**



**Dimensional
Stability**



**Liquid
Repellent
Surface**



**Fire & High
Temperature
Resistant**





**Resistant
To Stains**

SPARKO 05

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 6 Face






SPARKO 03

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 4 Face



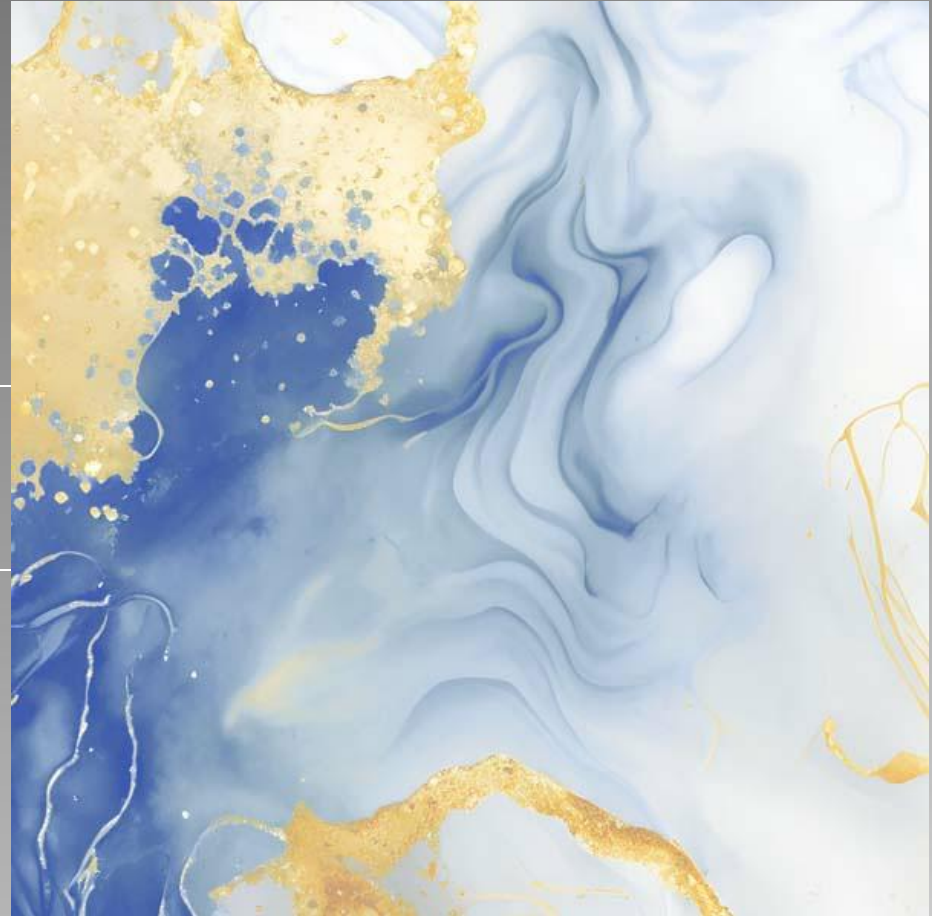


SPARKO 03

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 4 Face


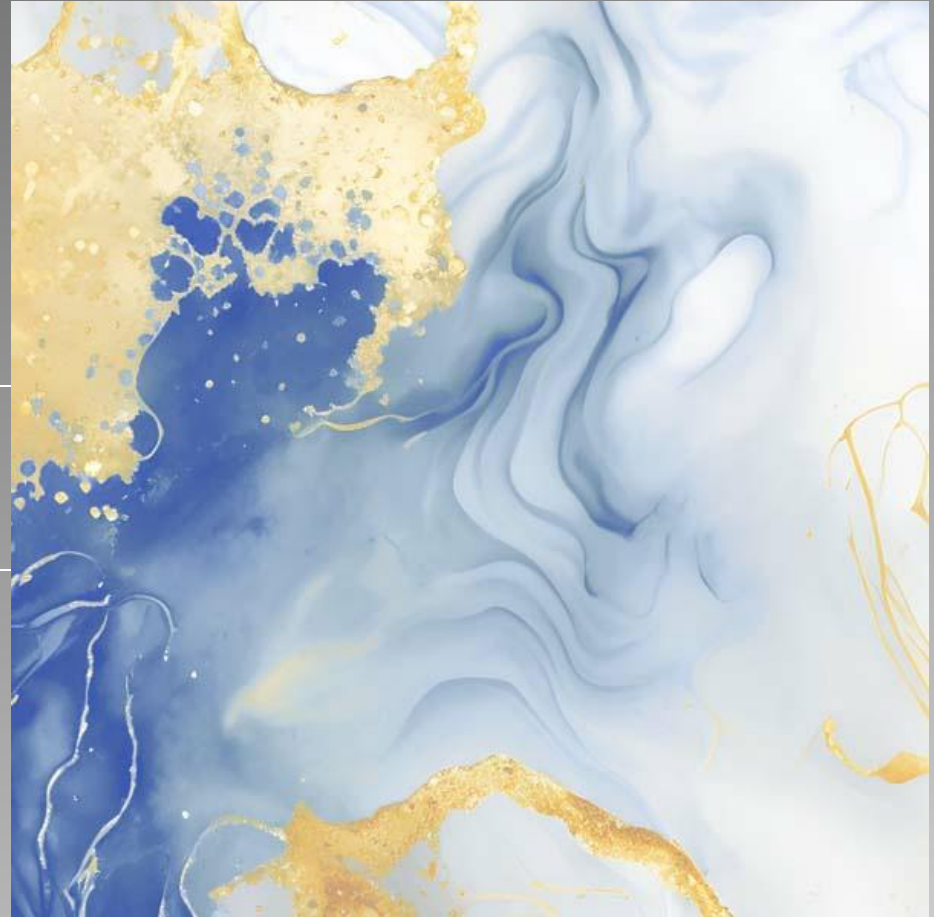


SPARKO 05

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 6 Face






SPARKO 05

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 6 Face





SPARKO 05

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 6 Face





SPARKO 05

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 6 Face





SPARKO 05

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 6 Face




SPARKO 12

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 6 Face




SPARKO 11

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 6 Face




SPARKO 12

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 6 Face




SPARKO 12

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 6 Face




SPARKO 12

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 6 Face



SPARKO 15

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 4 Face




SPARKO 15 BASE

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 4 Face

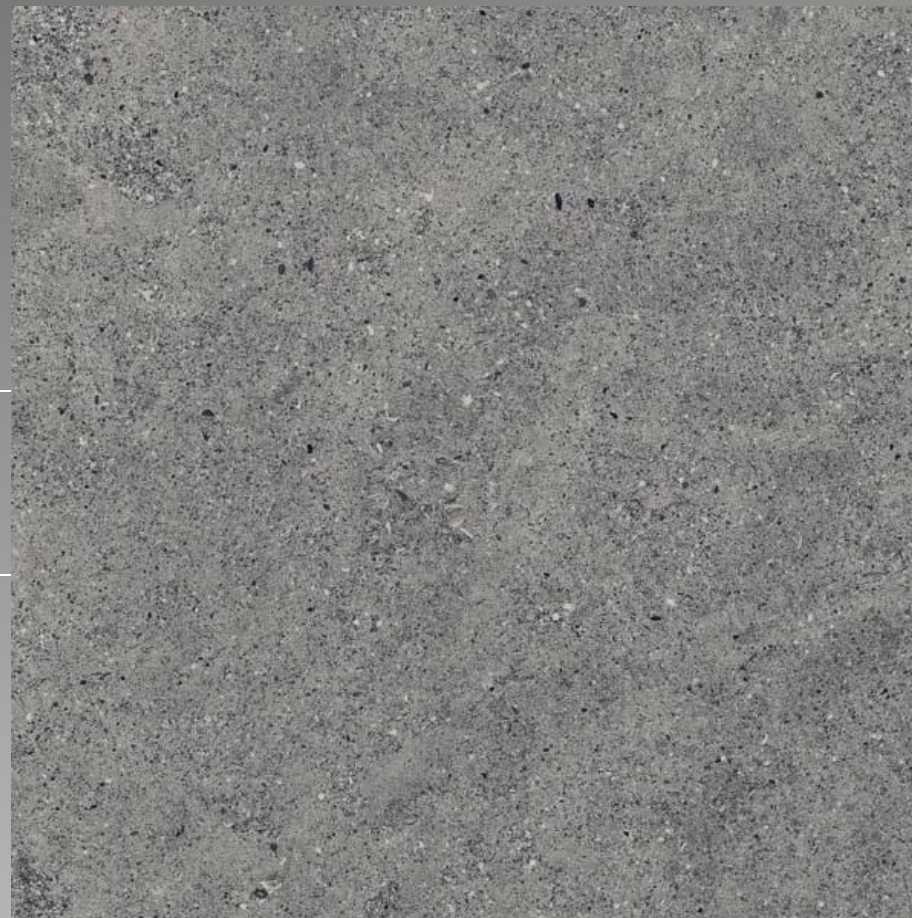

SPARKO 16

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 8 Face



SPARKO 16

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 8 Face




SPARKO 18

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 2 Face

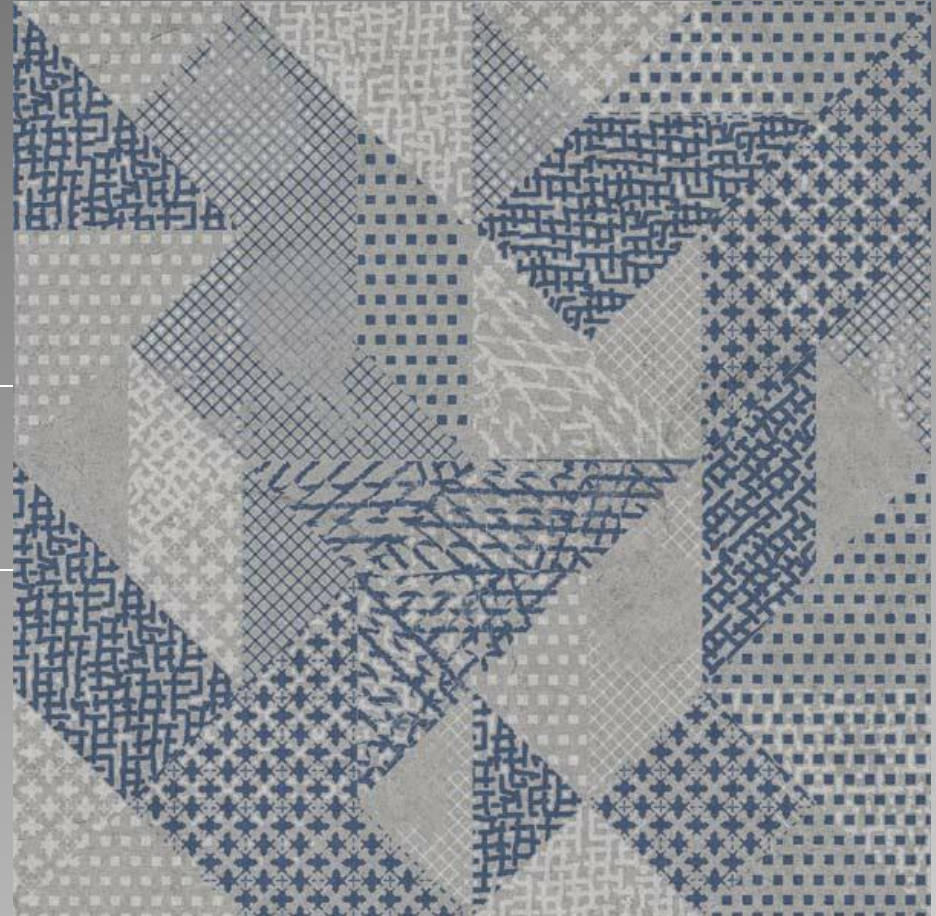


SPARKO 12

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 6 Face



SPARKO 20

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 6 Face



SPARKO 21

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 1 Face





SPARKO 21 BASE

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 1 Face

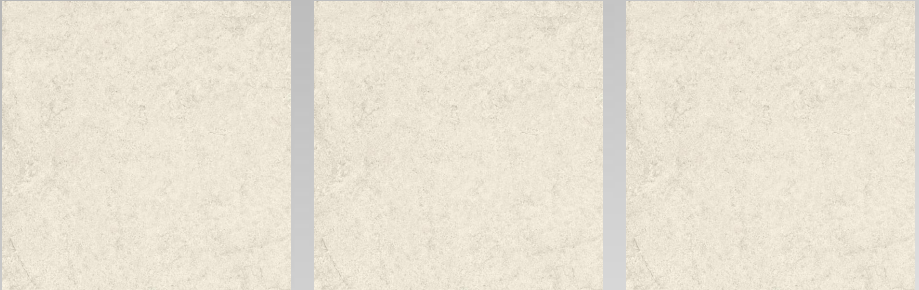
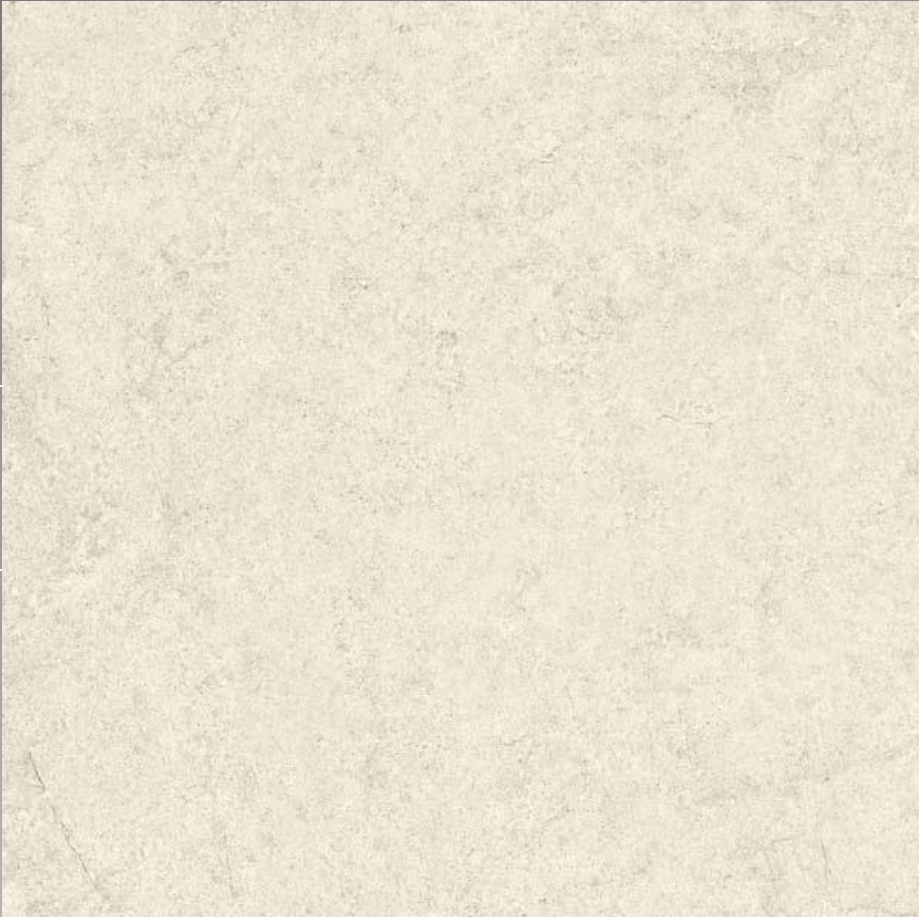


SPARKO 22

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 4 Face




SPARKO 23

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 4 Face



SPARKO 23

Finish

SUGAR + CARVING

600x600mm | 8.5mm Thickness | 4 Face



Technical Detail

SRNO.	CHARACTERISTICS	ISO TEST METHODS	TILES REQUIREMENT AS PER ISO 13006 : 2012 GROUP B LLB	SISCON VALUE
-------	-----------------	------------------	--	--------------

DIMENSION & SURFACE QUALITY

1	Deviation in length & Width	ISO 10545-2	+/-0.5%	+/-0.2%
2	Deviation in Thickness	ISO 10545-2	+/-5%	+/-3%
3	Straightness Of sides	ISO 10545-2	+/-0.5%	+/-0.2%
4	Rectangularity	ISO 10545-2	+/-0.5%	+/-0.2%
5	Surface Flatness	ISO 10545-2	+/-0.5%	+/-0.2%

PHYSICAL & THERMAL PROPERTIES

1	Water Absorption	ISO 10545-3	<0.50%	< 0.04%
2	Mohs Hardness	EN-101	Min.5	Min.5
3	Flexural Strength	ISO 10545-4	>35N/mm2	>40N/mm2
4	Skid Resistance	ISO 10545-17	>0.4	>0.4
5	Breaking Strength	ISO 10545-11	>1113N	>1800N
6	Frost Resistance	ISO 10545-12	Frost Proof	Frost Proof
7	Thermal Shock Resistance	ISO 10545-9	No Damage	No Damage
8	Moisture Expansion	ISO 10545-10	Nil	Nil
9	Resistance to surface Abrasion	ISO 10545-7	Abrasion class shall be specified by the manufacturer	PEI IV

CHEMICAL PROPERTIES

1	Chemicals Resistance	ISO 10545-13	No Damage	No Damage
2	Color Resistance	ISO 10545-16	No Damage	No Damage
3	Stain Resistance	ISO 10545-14	Resistant	Resistant

PACKAGING DETAIL

SIZE	PCS./BOX	SQM./BOX	APPROX WEIGHT/BOX	THICKNESS
600X1200MM	2	1.44	29 KG.	9MM
600X600MM	4	1.44	275 KG.	8.5MM